
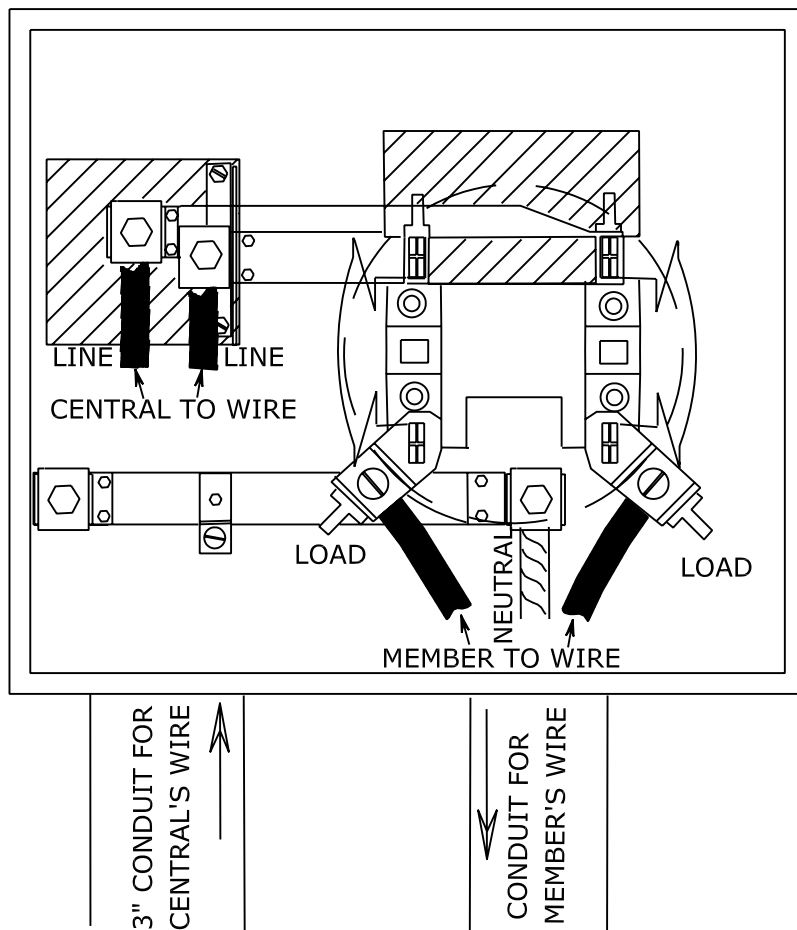


SINGLE PHASE METER BASE FOR UNDERGROUND SERVICE

- Single phase meter bases will be provided by the member (except ETS 3-gang and Multi-phase bases which the Cooperative provides).
- Meter bases will be ringless, minimum of NEMA type 3R design, weather-tight, with side mounted by-pass, horn-type socket lugs which must accept 4/0 conductor, and bottom knockouts for 3" conduit. Installed height -- 3 ft. minimum.

CONNECTIONS

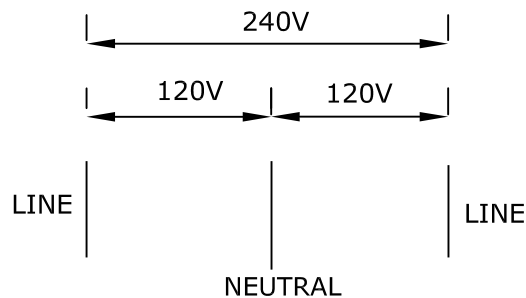

REVISED 2/3/05 LB

FIGURE 1.1