
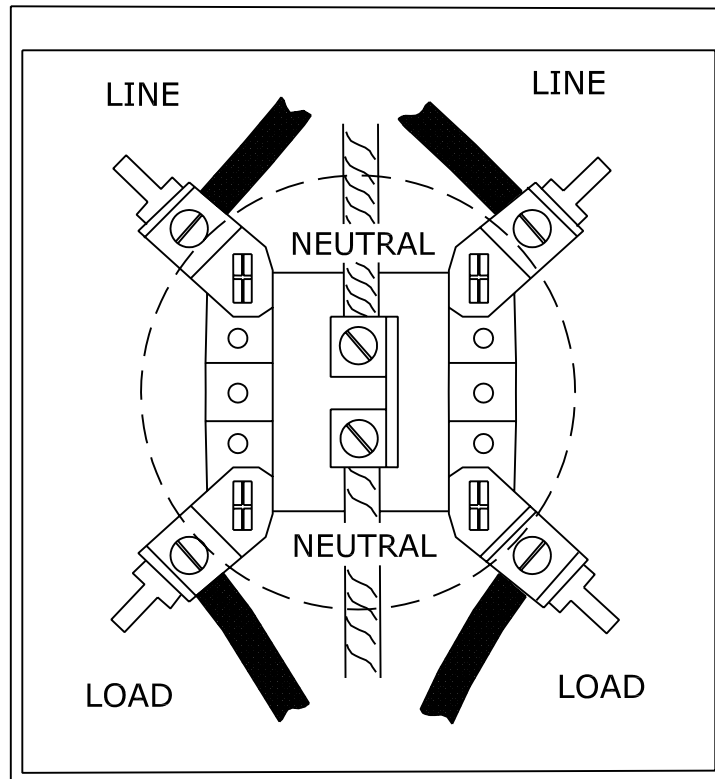


# OVERHEAD SINGLE PHASE METER BASE

- Single phase meter bases will be provided by the member (except ETS 3-gang and Multi-phase bases which the Cooperative provides).
- Meter bases will be ringless, minimum of NEMA type 3R design, weather-tight, and the socket lugs will be of bypass horn type construction for use by the Cooperative during meter maintenance.
- Meter bases will be rated between 100 and 320 Amps. Overhead sockets will require a hub opening at the top for overhead entry. Overhead service must utilize this hub opening.

## CONNECTIONS

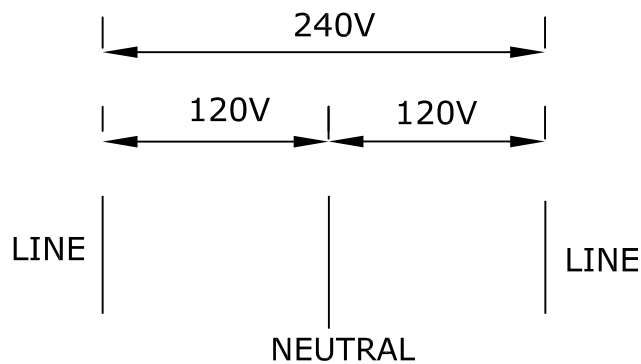

Revised 4/3/03 by LB

**FIGURE 1**